



SSCT58V52DB

Surface Mount Bidirectional Transient Voltage Suppressors


● Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

● Features

- ✧ Glass passivated or planar junction
- ✧ Excellent clamping capability
- ✧ SMB/DO-214AA Package
- ✧ Working voltage:58V
- ✧ Low profile package and low inductance
- ✧ Repetition rate (duty cycle):0.01%
- ✧ Response Time is Typically < 1 ns
- ✧ less than 5.0ns form 0 Volts to BV min
- ✧ Hight temperature soldering: 260°C/10s at terminals
- ✧ Plastic package has Underwrites Laboratory Flammability 94V-0
- ✧ For surface mounted applications in order to optimize board space
- ✧

● PIN configuration




SMB/DO-214AA



Bi-directional

Circuit Diagram



Marking (Top View)

● Applications

- ✧ POE application
- ✧ I/O Interface
- ✧ AC/DC Power supply
- ✧ Low frequency signal transmission line (RS232, RS485, etc.)

● Mechanical Characteristics

- ✧ Case Material: “Green” Molding Compound
- ✧ UL Flammability Classification Rating 94V-0
- ✧ Polarity: Color band denotes cathode except bi-directional models
- ✧ Standard Packaging: 12mm tape (EIA STD RS-481)
- ✧ Terminal Connections: See Diagram Below
- ✧ Marking Information: See Below



- **Absolute maximum rating @T_A = 25°C**


Parameter	Symbol	Value	Units
Peak Pulse Current(8/20μs)	I _{PP}	650	A
Peak Pulse Current(10/700μs)	I _{PP}	100	A
Peak Pulse Current(10/1000μs)	I _{PP}	40	A
Operating Temperature Range	T _J	-55 ~ 150	°C
Storage Temperature Range	T _{STG}	-55 ~ 150	°C

- **Electrical Characteristics @T_A = 25°C**


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V _{RWM}				58	V
Breakdown Voltage	V _{BR}	I _T = 1mA	64.4		71.2	V
Reverse Leakage Current	I _R	V _{RWM} =58V			10	μA
Clamping Voltage	V _C	I _{PP} =650A, t _P = 8/20μs		75	80	V
Clamping Voltage	V _C	I _{PP} =100A, t _P = 10/700μs		75	80	V
Clamping Voltage	V _C	I _{PP} =40A, t _P =10/1000μs		60	65	V




● **Typical Performance Characteristics**($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

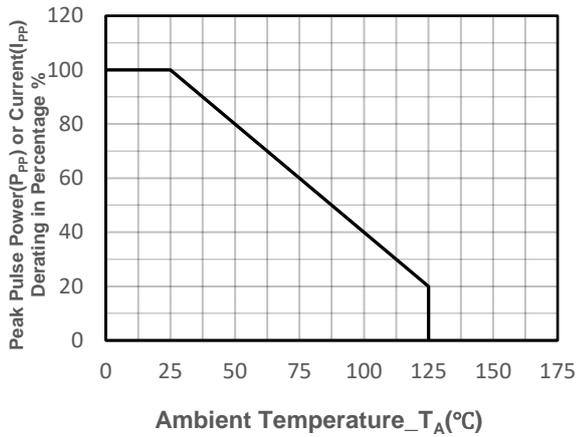

Pulse Derating Curve

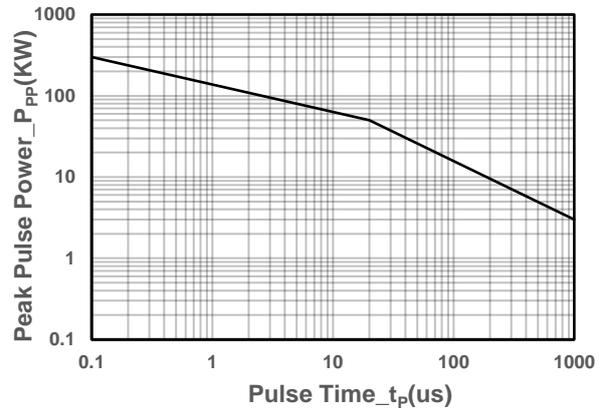

Peak Pulse Power vs. Pulse Time

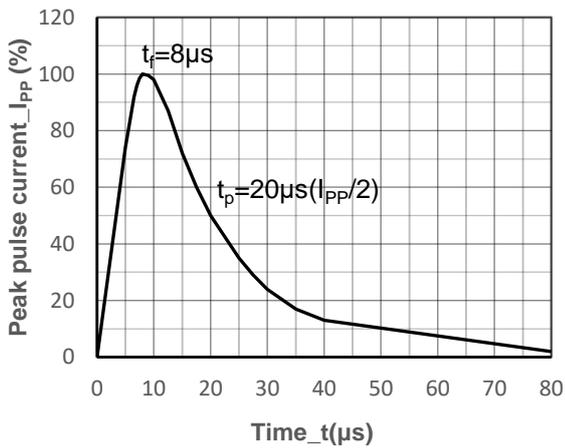

8/20µs Pulse Waveform



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel diameters(inch)
SSCT58V52DB	SMB/DO-214AA	3000	13

Mechanical Data


Case: SMB/DO-214AA

Case Material: Molded Plastic. UL Flammability

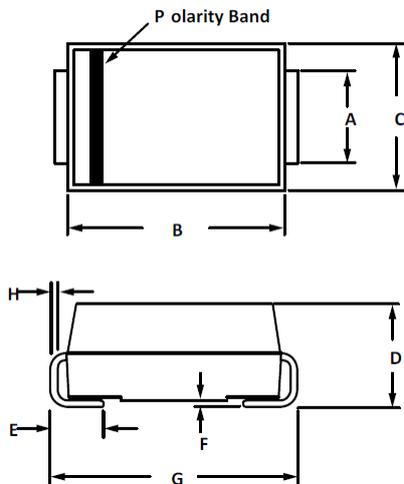

DIM	Millimeters	
	Min	Max
A	1.90	2.1
B	4.22	4.70
C	3.40	3.94
D	2.00	2.50
E	0.90	1.42
F	0.00	0.23
G	5.21	5.59
H	0.15	0.31

Recommended Pad outline (Unit: mm)

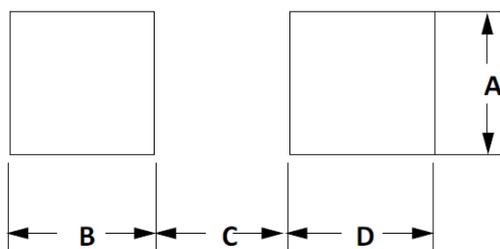

DIM	Millimeters	
	Min	Max
A	2.15	-
B	1.45	-
C	-	2.55
D	1.45	-



DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AF SEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.